installation diagram

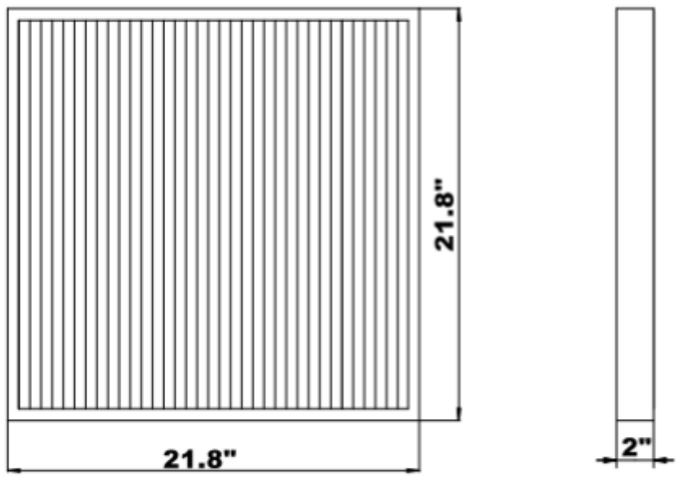

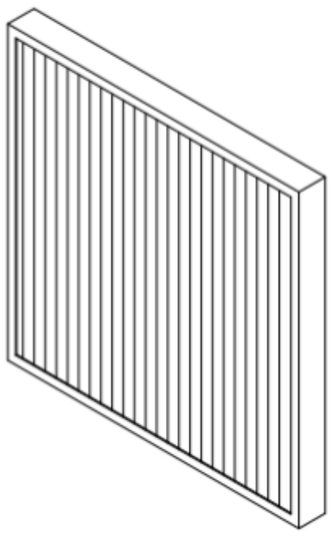

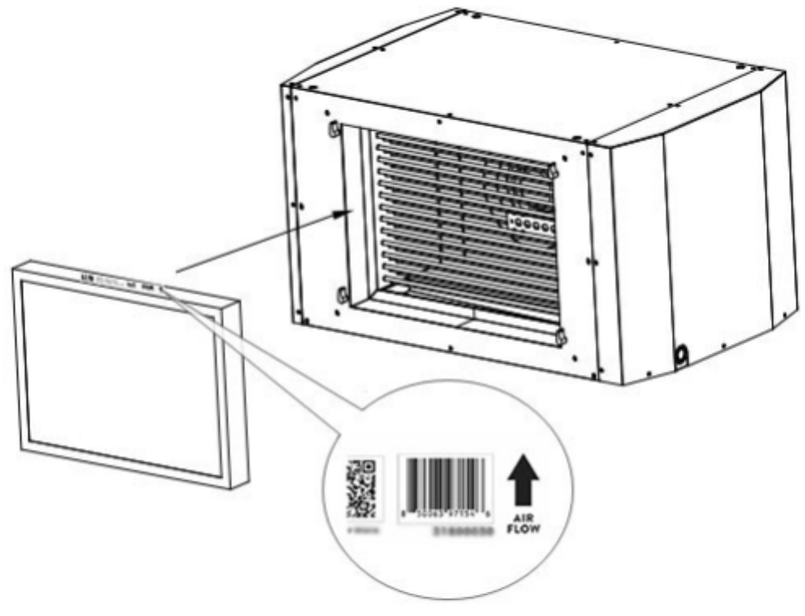

Check the airflow direction before installing the filter

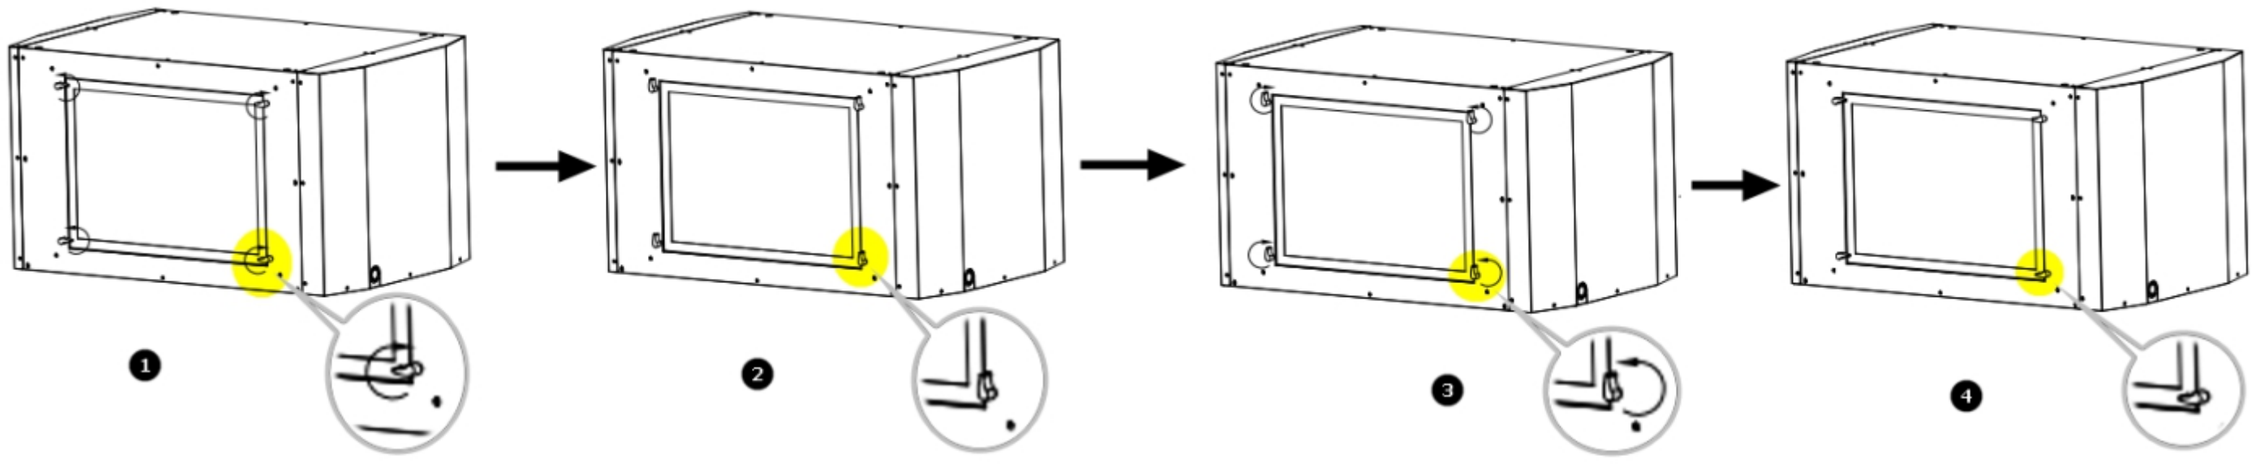

Turn the four set screws to the position shown in Figure II

Remove the filter

Put in a new filter

Return the set screw to its original position

parameter

Item	Description
Product Model	Ft311
SKU	31800043
Material	aluminum alloy+ non-woven fabric
filtration level	Merv11
size	21.8x21.8x2 inches
Compatible Models	31000020 Lg195 31000065 Lg195D 31000024 Lg228 31000060 Lg228C 31000025 Lg335 31000066 LG335C

attention

1.Replacement:
- Standard: Every 3 months.
- With pets, dust, or allergies: replace more often (1-2 months).
- Check monthly. Replace if it looks dark when held to light.

2.Installation:
- Ensure the arrow (→)on the frame points into the unit/blower.
- Use the exact size. Install snugly with no gaps.

3.Important Notes:
- DO NOT wash or reuse. It's disposable.
- Works in most modern systems. May reduce airßow in old/undersized units.
- Captures dust, pollen, pet dander. Not for viruses, smoke, or gases.

Installation Instructions

1.Power Off & Remove
- Turn off the power to the air conditioning/fresh air system.
- Unscrew the four Þxing screws and remove the old Þlter.

2.Verify & Install
- Ensure the new Þlter matches the old one in size.
- Insert the new Þlter with the arrow (→) on the frame pointing into the unit.

3.Restore & Finish
- Secure the screws back to their original positions and restart the system.
- Note the replacement date on a corner of the Þlter.

Safety Tip: Always disconnect power before proceeding.